


Termologitron
DPM 6-1, 6-2, 6-3 ETI

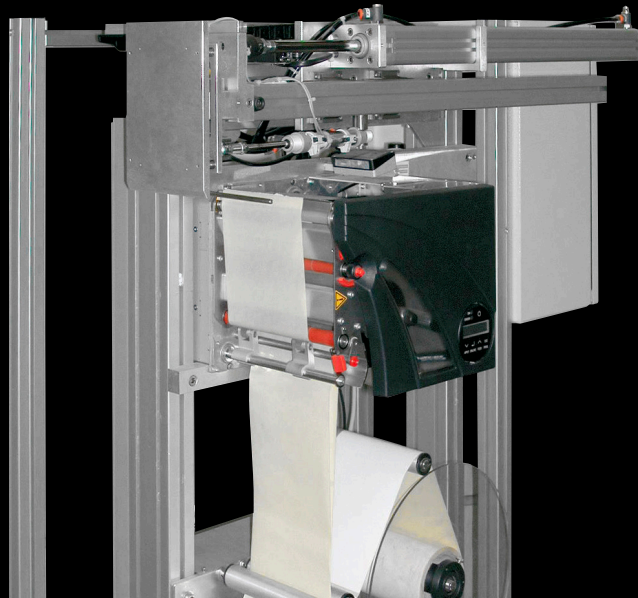

Method for printing and application for A5 sized self adhesive labels on one, two or three adjacent sides on pallets. The applications is executed at still pallet.

Termologitron DPM 6-1, 6-2, 6-3 ETI

Termologitron is able to apply a label every 7-10 sec. according to version.

Base structure executed in anodized aluminium profiles with adjustment feet for fixing on floor;

Label movement system composed by:

X axis linear cylinder with standard stroke 800 mm.

Y axis on rails, standard movement 400 mm.

PLC to handle logic signals with the movement system.

Ground path 1200x1100 mm.



FEATURES	
Print Module	Avery DPM 6" (Available Avery DPM 4", 5")
Techonology	Thermal transfer printer, direct or through ribbon
Print head	Near edge 300 DPI (12 dots/mm)
Print head width	160 mm
Labels width	from 16 to mm 190
Labels max. length	1000 mm (print module capability)
Printing speed	from 50 to 400mm/sec - steps 5 mm/sec
Ribbon length	max 1.000 meters
Emulation	Easy Plug, Windows Drivers
CPU	Integrated, 64 bits
I/O	USI I/O 5V 24V DC interface for signal alarm/errors
Interfaces	RS232/485, baud rate up to 115,2 KB Centronics parallel
Ribbons saver	Included, activated from a 9 mm. non-printed area
Fonts	17 including OCR-A, OCR-B, 2 vectorial fonts
Barcodes	All most used including 2-D
Display	Multilanguage, 16 characters, 2 lines, backlit 360° turnable
Power supply	220 Vac 0.9 KW 4.5 A
Air supply	5 bar/60 litres per minute
Dimensions	With standard 800 mm cylinder L x W x H: mm 1.200 x 1.100 x 1.700

Cicrespi spa
 Etichettatura Industriale
 20060 Liscate Milano - Italy
 Via Trieste, 11
 Tel. +39.02.95.75.42.60
 Fax +39.02.95.75.42.68
 etichettatura@cicrespi.com
 www.cicrespi.com

UNI EN ISO 9001:2000
 Sistema Gestione Qualità
 Certificato da Certiquality